


# DIGITAL CHARGING BOARD

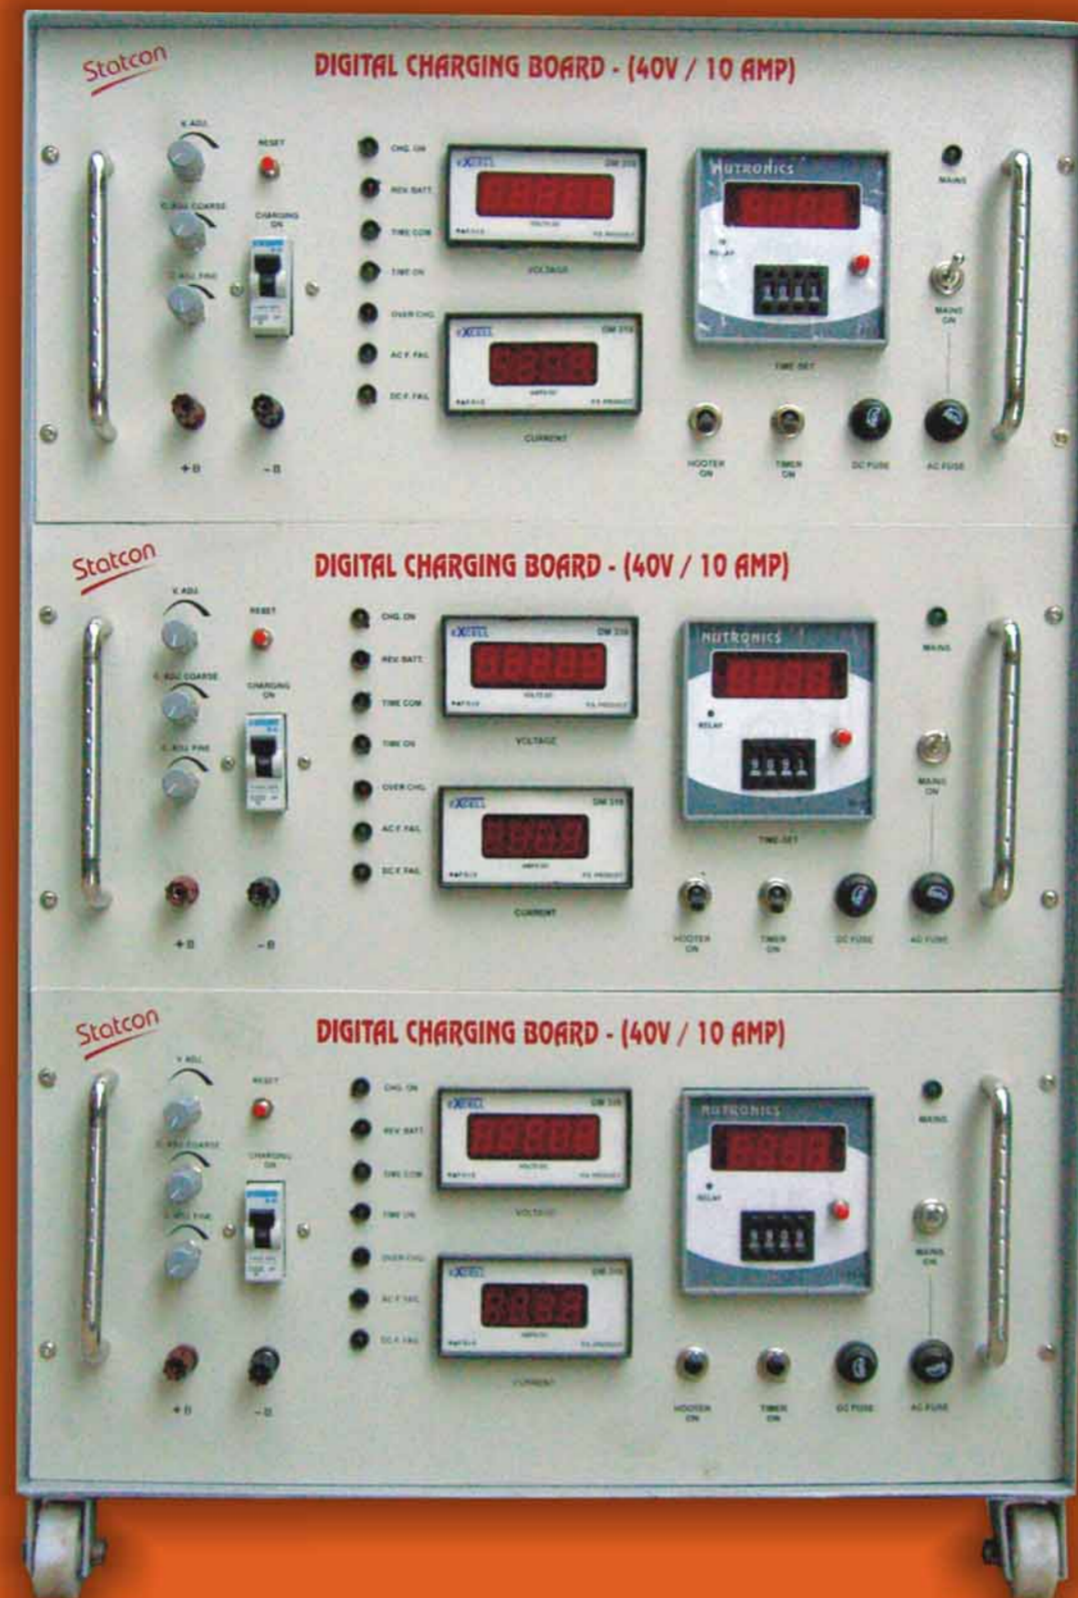

Input	: 230V $\pm$ 10%, 50Hz, 1Ph AC
Output Voltage	: 12V / 24V Battery (Suitable for Ni-cd & Silver-Zinc Battery both)
Output Current	: 10A, 25A, 50A
Regulation	: $< \pm 1\%$
Ripple	: $< 2\%$
Ambient	: $-10^{\circ}\text{C}$ to $+55^{\circ}\text{C}$
Altitude	: upto 1500 Meter above MSL
(Other ranges also available on request)	